Engineered and manufactured gas and liquid process solutions

LECTRODRYER

adsorption technology experts since 1932

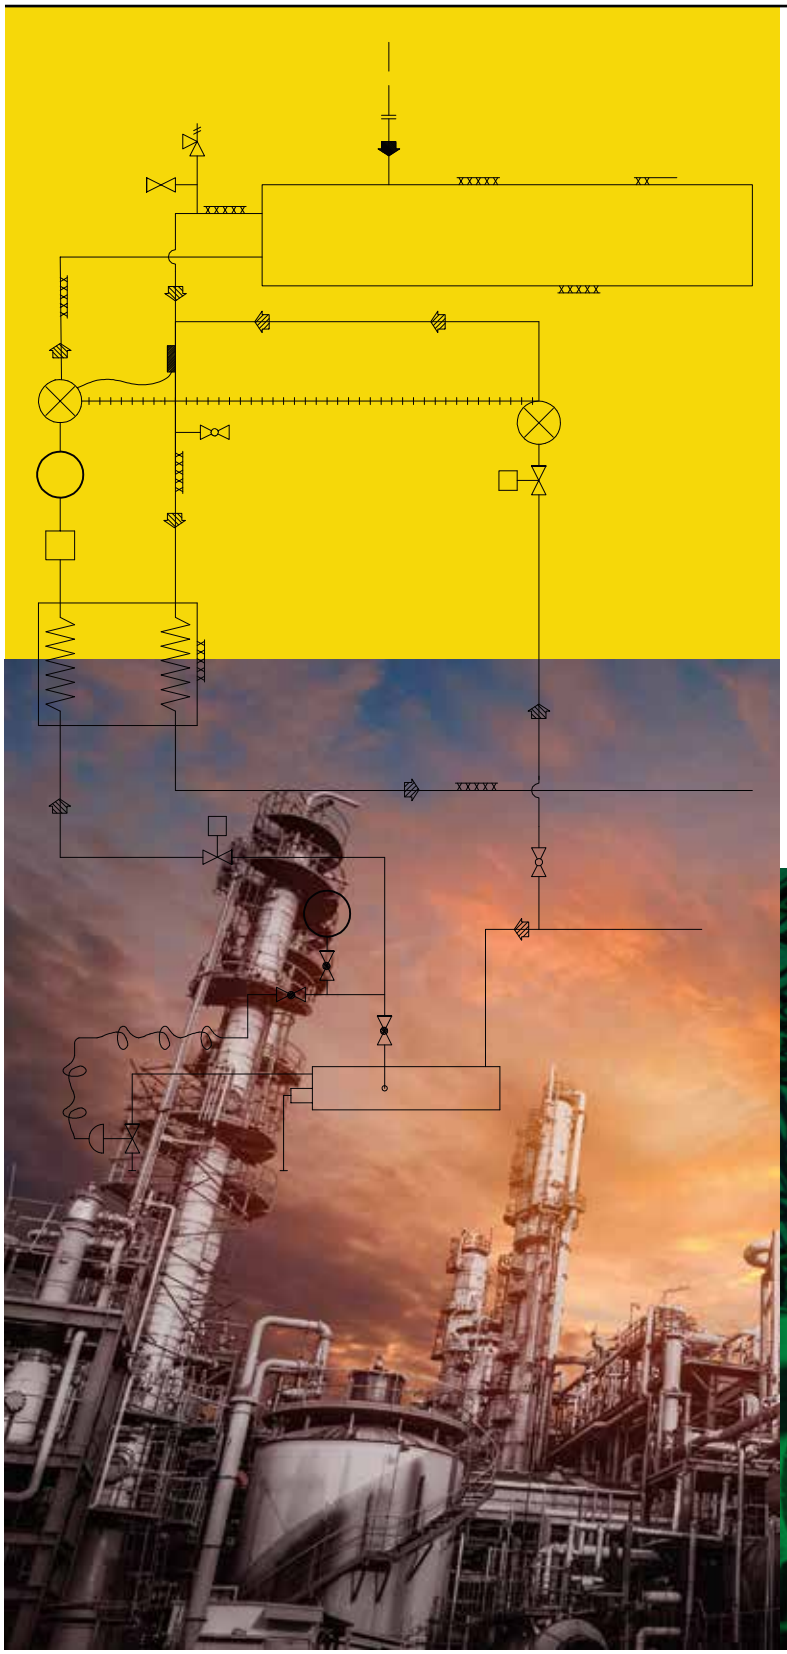

TYPE BX
SOLVENT & LIQUID DRYERS

The Type BX Lectrodryers are designed for the removal of water and other impurities from liquids down to less than 0.1 ppm. The presence of impurities in many process liquids can be an annoying or even a disastrous situation.

TYPE BX LECTRODRYER for liquid purification

The BX Lectrodryer are dual or single tower units designed for the continuous or intermittent drying of process liquids to very low outlet water concentrations. Solid adsorption is used utilizing the best desiccant for the application. Several standard size dryers are available for most applications plus Lectrodryer can custom design units to fit any specific drying need. Standard units are shipped complete, ready to place into operation after process and utility connections are established.

FEATURES

The standard Type BX Lectrodryer features include carbon steel pressure vessels with ASME Code stamping for 150 psig where applicable, stainless steel perforated metal desiccant supports, desiccant fill and drain nozzles, individually operated straightway valves for lower switching, thermal relief valves, pressure and temperature gages, reactivation package and either manual, semi-automatic or fully automatic operation with either NEMA 1, 4, 12, or 7 electrical enclosures.

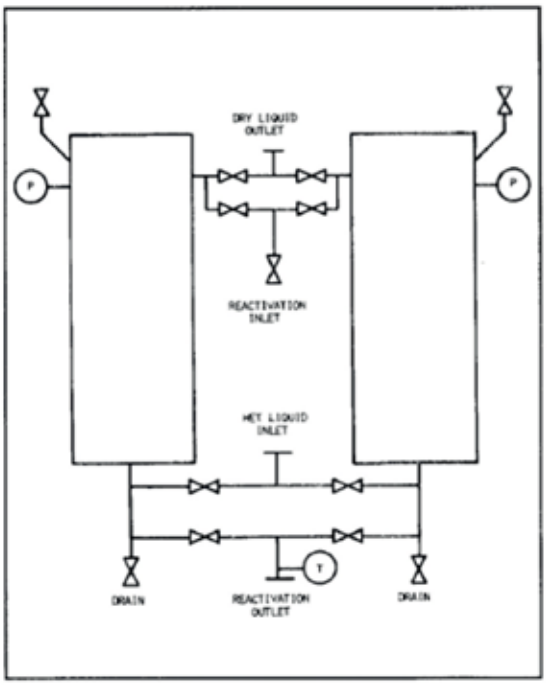

*Also available in single tower units and multiple units

TYPICAL SPECIFICATIONS

Model	Length (inches)	Width (inches)	Heigth (inches)	Weight (LBS)	Electric Reactivation Connected load/KVA
B-225	60	28	75	1250	4 5
B-325	70	35	75	1750	7.5
B-600	75	35	110	3000	15
B-1000	75	40	110	4750	24
B-1500	80	48	120	7800	40
B-2000	130	60	120	9100	50
B-3000	134	60	125	14250	70
B-4000	137	65	125	17800	100
B-5000	140	67	128	22100	120
B-6500	140	70	128	31200	150
B-8000	150	80	130	36800	190
B-12000	180	110	140	52000	280
B-20000	214	140	142	61000	460

TYPE BX reactivation alternatives

The type BX Lectrodryers can utilize either electric or steam regeneration in a variety of reactivation schemes. Open or closed circuit regeneration and cocurrent or counter current heating and cooling is available. The proper reactivation scheme is chosen by experienced Lectrodryer engineers depending upon the specific application.

TYPE BXO

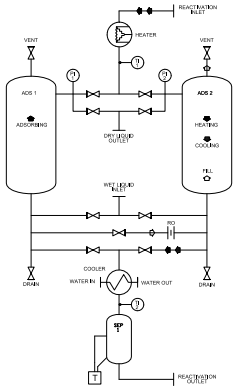

- Purge Gas Regeneration
- Cocurrent or countercurrent heating and cooling

TYPE BXC

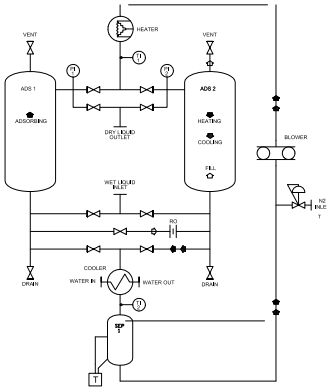

- Closed Circuit regeneration
- Conservation of regeneration gas
- Cocurrent or countercurrent heating and cooling

TYPE BXR

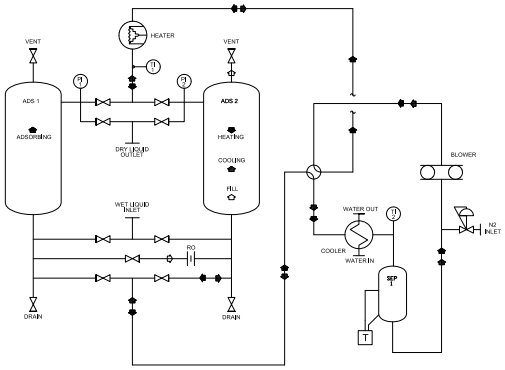

- Closed loop regeneration
- Countercurrent heating and cooling
- No outside regeneration gas source
- Process liquid used as regeneration gas

TYPE BXZ

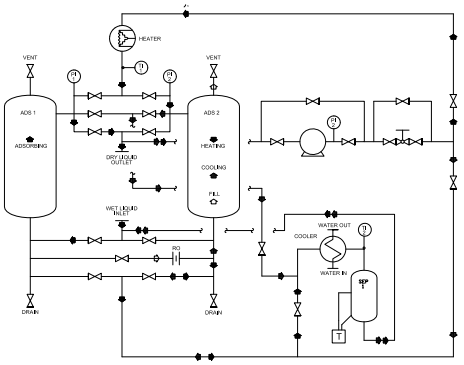

- Closed Circuit regeneration
- Counter heating and cooling
- Conservation of regeneration gas

LECTRODRYER offers a complete range of drying and purification equipment:

*** For atmospheric or high pressure conditions *For very small or very large volumes**
***For air, gases, liquids and certain organic fluids *Completely packaged systems**
***Custom engineered and manufactured**

Regenerative Adsorption Dryer

Typical applications:
Drying compressed air for instruments; purging of refrigeration coils, compressors, and systems; drying air for ozone generators; vacuum-breaking operations controlled atmosphere gas.

Features:
Carbon steel pressure vessels with ASME Code (where applicable) for up to 150 psig stainless steel perforated metal desiccant support and inlet flow diffuser, sheathed or non-sheathed heating element in which each adsorber vessel with thermostatic over temperature protection in the heater bundle, two 4-way lubricated plug valves with air piston operator and solenoid valve controls, thermal pressure relief valves, pressure gages, dial thermometer in the purge outlet, 110 volt controls and NEMA 1 electrical enclosures.

Optional Features:
Special controls and electrical enclosures.

Refrigeration-Type Industrial Gas Dryer

Typical Application:
Low pressure situations for controlling atmospheric gases.

Features:
Power-on light, high temperature warning light, on/off switch, refrigeration analyzer gage, gas-out gage, gas-in temperature gage, low suction pressure cut-out, high head pressure cut-out, hot gas bypass capacity control, start push button pump down shut off cycle, oil pressure control, and suction accumulator.

Optional Features:
Special control and electrical enclosures.

Lectrodryer Filters

The Lectrodryer type SF and type F filters provide high efficiency filtration with ten sizes available in each type for flows to 8400 SCFM, larger sizes available on application. Both types have a high level filter.

Lube Oil / Air Tanks

Lectrobreather tank vent dryers prevent atmospheric moisture from entering storage during "breathing" due to ambient temperature changes and draining periods.

Information contained in this brochure is for reference only and needs to be confirmed by a Lectrodryer representative.

BX Brochure Rev. 01

LECTRODRYER
www.lectrodryer.com
135 Quality Drive
Richmond, Kentucky 40475
P.O. BOX 2500
Richmond, Kentucky
40476-2602
Phone +1 (859) 624 2091
Fax +1 (859) 623 2436
USA Toll Free +1 (877) 403 5215